


CAT NO: HSLEDBH/ST

INSTALLATION

Please refer to the wiring diagram shown below:

1. Installation should be by a qualified electrician.
2. Switch power off at the consumer unit and ensure that there is no power to the lamp.
3. Remove the **Diffuser** by **Screwdriver**, see figure.
4. Unscrew the **Screw (A)** and remove the **Transparent Plate**.
5. Mark the mounting hole position onto the wall. Drill and plug the wall at the marked positions. Screw the lamp body to wall with suitable **Mounting Screws** (supplied)
6. Connect the main power cables to the **Terminal Block** (see the relative symbols, the **Cable** must pass through the **Wiring Rubber Gasket**).
7. Re-screw **Transparent Plate**.
8. Re-fit the **Diffuser**.
9. Finally turn the power back on.

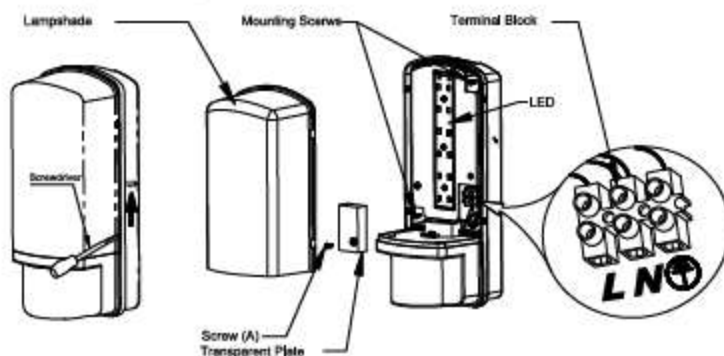

Mounting and Wiring to Terminal

SPECIFICATIONS

Voltage: 230 V~ 50 Hz

Wattage: Max12x0.5W LED

LUX control level: about 20lux

Weatherproof: IP44

Class I protection

Non Dimmable

