

PRODUCT FEATURES:

- 4 Wattage Adjustable
- 3CCT Selectable
- IP65 Rated
- Hinged Gear Tray
- Polycarbonate body & diffuser
- Halo effect backlight
- 5 x 20mm conduit entry points



DESCRIPTION:

The Pacific LED Bulkhead combines modern LED technology with a robust design for versatile and energy-efficient lighting. Ideal for both indoor and outdoor applications, this bulkhead offers reliable illumination and durability, enhancing visibility and security.

TECHNICAL SPECIFICATION:

Product Code:	HSLEDDF-3CCT
Wattage:	12, 15, 18, 22
Voltage:	230v 50hz
CCTk:	3000k, 4000k, 6000k
CRI/Ra:	>80
Rated life:	30,000hrs
Lumens:	1200, 1500, 1800, 2200
Lumens per watt:	100Lm/W
Ambient Op. Temp:	-5°C to 25°C
IP Rating:	IP65
IK Rating:	IK10
Protection Class:	Class II
Weights:	0.84 kg

PRODUCT CODES:

HSLEDDF-3CCT = Pacific LED Bulkhead


PRODUCT CONSTRUCTION:

Product Construction:	Polycarbonate
Weight (Unboxed):	0.84 kg
Cable Entry:	Centre of Base & 4no. 20mm side knockouts

**All information is subject to change and should be verified before any critical action.*



LINE DRAWINGS:

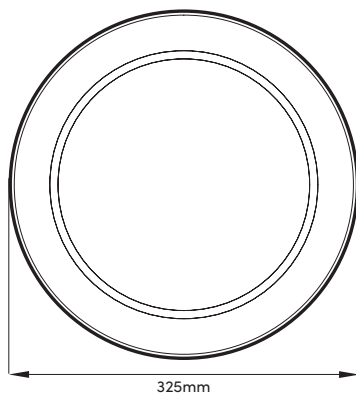


**All information is subject to change and should be verified before any critical action.*



HSLEDDF-3CCT PACIFIC LED BULKHEAD

ACCESSORIES:

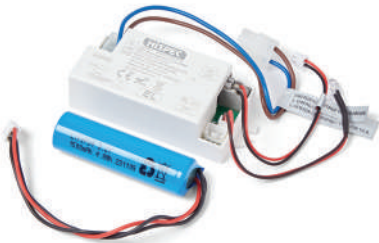

HSLEDDF-MOD/EP = Plug and Play Emergency Pack for HSLEDDF-3CCT and HSLED-RETROFITGT



HSLEDDF-MOD/MS = Plug and Play Microwave Sensor for HSLEDDF-3CCT and HSLED-RETROFITGT



HSLEDDF-MOD/CF = Plug and Play Microwave Sensor with Corridor Function for HSLEDDF-3CCT and HSLED-RETROFITGT

ACCESSORIES SETTINGS:

HSLEDDF-MOD/MS

Detection Range	Hold Time
ON <input checked="" type="radio"/> 100%	<input checked="" type="radio"/> 2 <input checked="" type="radio"/> 3 5s
<input type="radio"/> 50%	<input type="radio"/> 60s
Daylight Sensor	
<input checked="" type="radio"/> 4	<input checked="" type="radio"/> 3min
<input type="radio"/> Disable	<input type="radio"/> 10min
<input type="radio"/> 30lux	



HSLEDDF-MOD/CF

Sensitivity		
DIP switch	1	2
100%	●	●
75%	○	●
50%	●	○
25%	○	○

In this area, movement will be detected and able to trigger the sensor. 100% detection area is also known as the strong sensitivity.

Hold-time		
DIP switch	3	4
5s	●	●
1min	○	●
3min	●	○
10min	○	○

The period of light keeping 100% brightness after moving objects leave the detection area.

Daylight threshold	
DIP switch	5
Disable	<input checked="" type="radio"/>
30Lux	<input type="radio"/>

Definition of the ambient brightness; only when the ambient brightness is lower than the preset specific lux amount, the sensor will work; when it's preset as "disable", the sensor will detect motion regardless the ambient brightness.



*All information is subject to change and should be verified before any critical action.

