

## SWITCH INPUT MODULE

COMPATIBLE WITH SMOKE, HEAT & CO ALARM



EASY INSTALL




GUARANTEE

### Features

- 10 Year battery backup
- Supplied with cover
- Fits Hispec Fast Fix base
- Pulse/continuous relay operation
- Volt free (dry) contacts
- Connect up to 20 Hispec fire devices per system
- Triggers the alarm system when N/O contacts close
- Can be linked to sprinkler system when changeover contacts are specified.
- Can be linked to EN54 Fire Panel

### Technical Information

Product Life	10 Years
Supply Voltage	230V AC, 50/60Hz, 50mA
Backup Battery	3V Rechargeable Lithium Battery (Sealed)
Output	Contact IN - SW
Knock-Outs	25 x 20mm, 16 x 20mm
Interconnection	MAX 40pcs in 150 metres
Operating Temp	-10°C to 40°C
Operating Humidity	15% to 95% Relative Humidity
Plastic Material	ABS
Approval	CE

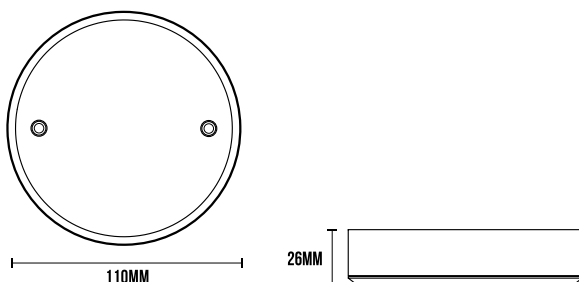

Product Code: HSSA/INPUTMODULE