


QUICK START GUIDE

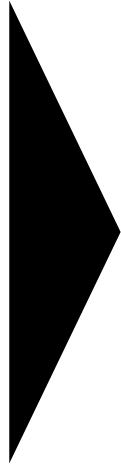


DO THIS BEFORE YOU INSTALL ANY OF THE DEVICES!

1. Turn the power on with the switch on the back of the Wall Switch.

2. Turn on all alarms to be installed in the system by sliding them onto their baseplates until they click into place.

3. Press and hold the “Home Group” button (H CODE) on the back of the Wall Switch until the Red LED lights up on the front as pictured below, then release. Now the Wall Switch is in “Home Grouping” mode.

Note: The “Home Grouping” mode on the controller will be active for 2 minutes 30 seconds. After this period, it will turn off automatically.

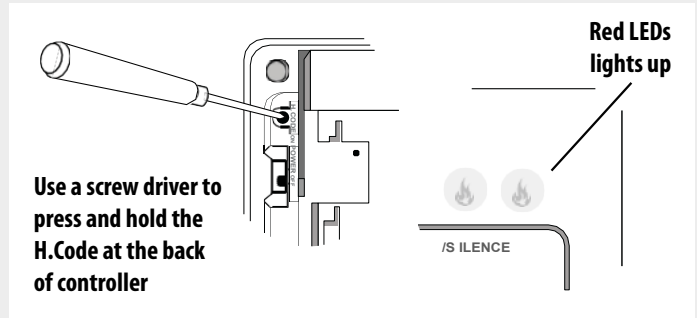

4. “Home Group” all of the alarms in the system. To do this, press the small rectangular pairing button on the side of the alarm baseplate **TWICE**. A Red LED next to this button will flash 5 times. This alarm is now in the Home Group.

5. Repeat Step 4 for each additional alarm. Ensure the Red LED stays lit on the Wall Switch throughout – if it goes off before you have finished, repeat Step 3 and continue Step 4 with any alarms not yet joined to the Home Group.

6. Now all of the devices are joined in the Home Group, they can be installed.

Note: The Wall Switch and all of the connected Home Group alarms have a memory function. When they are disconnected from their power supply or turned off (i.e. for installation), they will remain joined to the Home Group



LIGHTING • FIRE & CO DETECTION

For details on individual alarm devices, consult the instruction manuals enclosed with them.