



LIGHTING • FIRE & CO DETECTION




MAINS RELAY BASE

FEATURES

- Relay module for use with any Hispec mains powered smoke, heat & CO detectors
- Used to activate auxiliary devices
- With Normally Open and Normally Closed relay terminals
- Volt-free relay terminals
- Knock-outs provide flexibility of cable entry
- Robust ABS design
- Supplied with wall plugs and screws
- BESA Box mountable

TECHNICAL INFORMATION

Relay Terminals:	Normally Open & Normally Closed
Relay Switching Current:	3A max at 230v A.C. 2A max at 24v D.C.

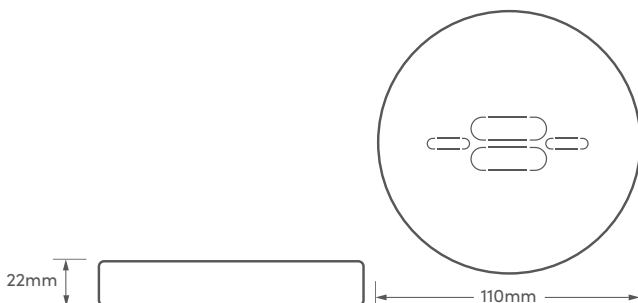

Product Code: HSSA/RB



RoHS
Compliant



hispec.co.uk

