




LIGHTING • FIRE & CO DETECTION



EMERALD UNIVERSAL BULKHEAD

FEATURES

- Hinged gear tray
- 3 hour emergency time
- Long lasting lithium battery
- Push-fit terminals
- Maintained/non-maintained
- 20mm stuffing gland included
- Multiple 20mm entry points
- Stick-on legends included

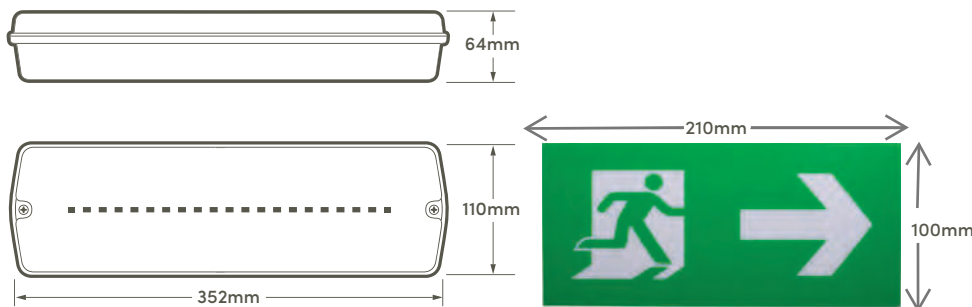

TECHNICAL INFORMATION

Rated Voltage:	220-240vAC 50/60Hz
Wattage:	4.5W
Lumen output (maintained and EM mode):	200lm
Colour temperature:	6000K
Battery (LiFePO4):	3.2V 1000mAh
Charging time:	24 hours
Battery protection:	Overcharge and over discharge protection
Ingress Protection:	IP65
Minimum emergency duration:	3hrs
Operating Temperature:	-20°C~40°C
Protection class:	Class II
Weight:	496g
Produced in accordance with:	BS EN 60598-2-22

Product Code: HSEM/LED



hispec.co.uk



Version: 01.06.23