




2CAS FIRE ALARM CONTROL PANEL



5
GUARANTEE

Features

- 2 Zone, 4 Zone & 8 Zone available
- Each device is uniquely addressable
- Can be wired as radial loop
- 15 Devices per zone
- Separate sounder circuit not required
- 2048 Event history log
- Surface mountable and recessed mountable

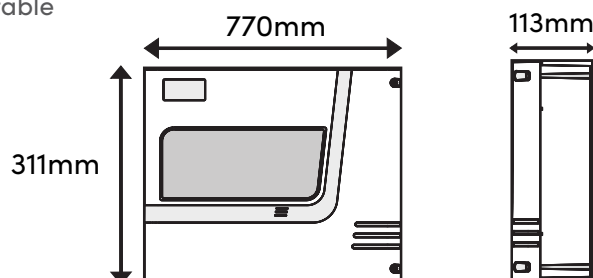

Technical Information

Supply Voltage:	230v ac 50/60Hz
System Voltage:	29vdc nominal (19-30v)
Loop Sounder Circuit Supply:	2 x conventional 28v nominal 150mA (20 - 30 vdc)
Fault Relay :	1xSELV@1A (normally energised)
Fire Relay:	1xSELV@1A
Detection Circuits:	8 Radial Circuits (Max) 4 Loop Circuits (Max)
Loop Sounder Circuit:	80 Sounder (Max)
Repeater Panel Connection:	RS485
Approved to:	BS5839-1 & 6
Designed to:	EN54-2 & 4

Product Code: HS2CAS/2ZP, HS2CAS4ZP & HS2CAS8ZP