



## 2CAS

### MANUAL CALL POINT




#### Features

- Supplied with clear plastic protective cover
- Supplied with reset key
- High impact ABS glass fibre material

#### Technical Information

Input Voltage:	17-28 VDC
Quiescent current:	600µ (Max)
Element Type:	Resettable
Alarm Current:	2.5MA (Max)
Ambient Op.Temp:	-20°C ~ + 60°C
Max Humidity:	95% RH Non-condensing
IP Rating:	IP32 (IP67 Available)
Designed to:	EN54 - 11
Weight (IP32):	150g
Weight (IP67):	250g

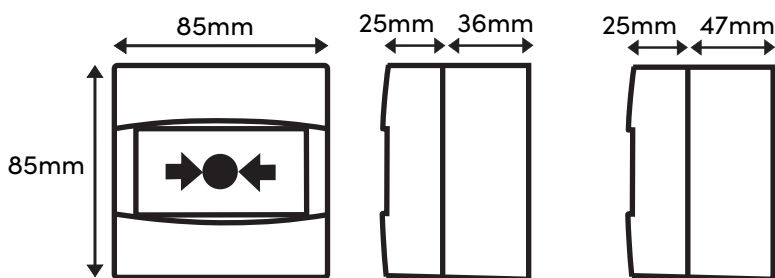

STANDARD IP32

IP67

Product Code: HS2CAS/MCP + HS2CAS/MCP-IP67