

PRODUCT FEATURES:

- 4 Wattage & 3CCT SWiTCH options
- Photocell Fitted as standard, feature can be disabled
- IP65/IK10
- Minimal Upward Light (1.1%) for Dark Sky Areas
- Multiple Cable Entry Options Including Conduit Box



TECHNICAL SPECIFICATION:

Lumens:	1900/2100/2500/3000
Watts:	14/17/21/24
Efficacy:	120-135Lm/W
CCTk:	3000/4000/6500
CRI:	>80
Rated Life:	50,000Hrs
Warranty:	5 Years
IP Rating:	IP65
IK Rating:	IK10
Electrical Class:	1
Operating Voltage:	220-240V AC
Operating Ambient Temperature:	-20C - +45C
Photocell:	ON=5-10Lux / OFF=30-50Lux (Feature can be disabled)

PRODUCT CODES:

HSLEDWP/PC = Orca SWiTCH Wall Pack 4Wattage/3CCT

HSLEDWP/EP/PC = Orca SWiTCH Wall Pack with 3Hr Emergency 4Wattage/3CCT

PRODUCT CONSTRUCTION

Housing:

Polycarbonate

Diffuser:

Polycarbonate


Colour:

RAL9004 Black

Weight:

1.5kg




LINE DRAWING

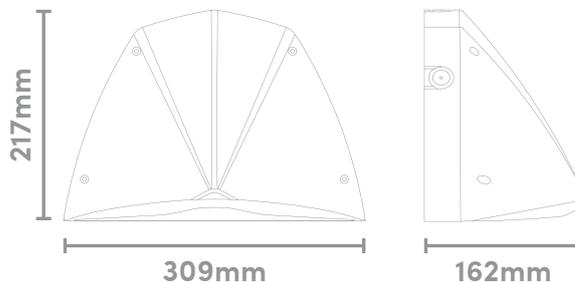

GUARANTEE

ACCESSORIES:

HSLEDWP-COVER = RAL7016 Anthracite Grey Cover for Orca SWITCH



*All information is subject to change and should be verified before any critical action.

