

## PRODUCT FEATURES:

- 110V
- 20Watt/2400lumens (EM 380lumens)
- 1M cable and IP44 Junction Box
- Mounting Clips for Fast-Fix
- IP65



## DESCRIPTION:

110V 2ft Linear Non Corrosive Luminaire for illumination of areas such as temporary walkways. Emergency lighting backup to provide 3hrs illumination from a full charge. Mounting clips for easy fixing, negating the need to drill the housing. Prewired to an IP44 junction box.

## TECHNICAL SPECIFICATION:

<b>Lumens:</b>	2400 (380 Emergency Output)
<b>Watts:</b>	20
<b>Lm/W:</b>	125
<b>CCTk:</b>	4000k
<b>CRI/Ra:</b>	80
<b>Rated Life:</b>	50000Hrs
<b>Warranty:</b>	2 Year
<b>IP Rating:</b>	IP65 (Wiring Box IP44)
<b>IK Rating:</b>	IK08
<b>Electrical Class:</b>	I
<b>Operating Voltage:</b>	110V AC
<b>Operating Ambient Temperature:</b>	-20°C to 40°C
<b>Materials:</b>	PC

## PRODUCT CODES:

**HSSL/20LEDWL-2FT/EP** = Site light 20W 110V 2ft c/w Emergency

## PRODUCT CONSTRUCTION:

**Housing Material:** Polycarbonate  
**Weight (Unboxed):** 1.088kg  
**Cable Entry:** Pre Wired - 1M cable and IP44 wiring box

*\*All information is subject to change and should be verified before any critical action.*



HSSL/20LEDWL-2FT/EP


## SITE LIGHT

1M CABLE & IP44 J-BOX

# HISPEC

LIFE SAFETY & HOUSING SOLUTIONS

### LINE DRAWINGS:

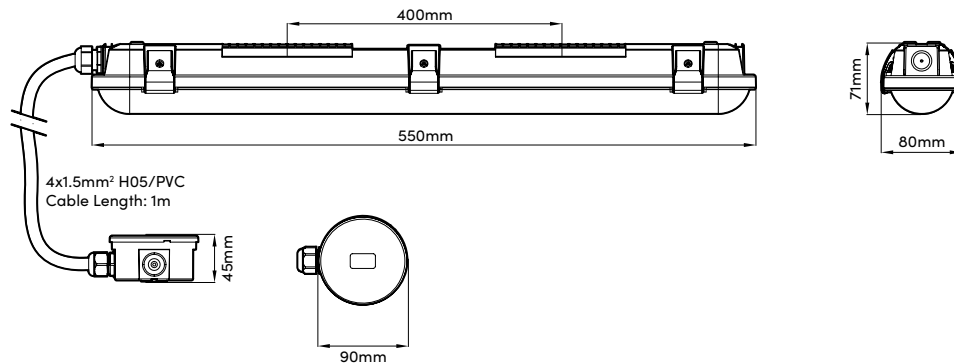

GUARANTEE



IP54



2400 LUMENS



380 Emergency  
Lumens



110V



WATTAGE



3HR EMERGENCY



\*All information is subject to change and should be verified before any critical action.

