

PRODUCT FEATURES:

- 4 Wattage & 3CCT SWiTCH options in 4ft, 5ft & 6ft lengths
- Plug and Play Self-Test Emergency and Microwave sensor accessories
- 150 Lumens per watt
- Tridonic Driver
- Multiple cable entry options and BESA fixing



TECHNICAL SPECIFICATION:

Lumens:	4ft = 3000/3900/4800/5550, 5ft = 4500/6000/7500/8400, 6ft = 5100/6300/7800/9300
Watts:	4ft = 20/26/32/37, 5ft = 30/40/50/56, 6ft = 34/42/52/62
Efficacy:	150Lm/W
CCTk:	3000/4000/6500
CRI:	>80
Rated Life:	50,000Hrs
Warranty:	5 Years
IP Rating:	IP20
IK Rating:	IK08
Electrical Class:	1
Operating Voltage:	220-240V AC

PRODUCT CODES:

HSLED4BA = Nile Pro SWiTCH 4ft Batten 4Wattage/3CCT

HSLED5BA = Nile Pro SWiTCH 5ft Batten 4Wattage/3CCT

HSLED6BA = Nile Pro SWiTCH 6ft Batten 4Wattage/3CCT

NILE PRO BATTENS

PRODUCT CONSTRUCTION

Housing:

Steel

Diffuser:

Polycarbonate


Colour:

White

Weight:

4ft= 1.3kg 5ft= 1.65kg 6ft= 1.9kg

LINE DRAWING

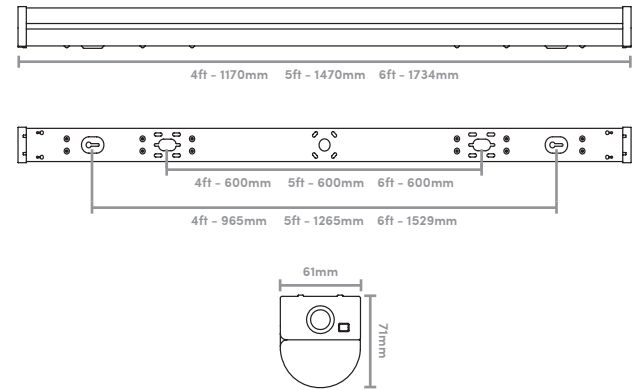

UK
CA

CE



IP20

IK08
RATED

CLASS I

5
YR
GUARANTEE

ACCESSORIES:

HSLEDBA-MOD/EP-ST = 3watt 3Hr Emergency Self-Test Emergency Pack for Nile Pro SWITCH

HSLEDBA-MOD/MS = Microwave Sensor for Nile Pro SWITCH

*All information is subject to change and should be verified before any critical action.



01257 262 197 customerservices@hispec.co.uk hispec.co.uk

Hispec Electrical Products Ltd, Unit 21 Drumhead Road, Chorley North Business Park, Chorley, PR6 7BX