

YARRA PRO SWITCH FIRE RATED DOWNLIGHT

PRODUCT FEATURES:

- 3 Wattage & 4CCT SWiTCH options
- 30/60/90 Min Fire Rated
- IP65
- LENNEL Loop IN/OUT Terminals
- Fixed & Tilt Bezel Options
(Supplied Separately)



TECHNICAL SPECIFICATION:

Lumens:	2200k - 430/600/720 3000k - 480/690/850 2700k - 470/670/810 4000k - 500/680/810
Watts:	4/6/8
Efficacy:	90-115Lm/W
CCTk:	2200/2700/3000/4000
CRI:	>80
Beam Angle:	60°
Rated Life:	50,000Hrs
Warranty:	5 Years
IP Rating:	IP65
IK Rating:	IK08
Dimming:	Trailing Edge (Recommended) or Leading Edge
Electrical Class:	1
Operating Voltage:	220-240V AC
Operating Ambient Temperature:	-10°C ~ 40°C
Ceiling Cut Out:	68mm - 75mm (70mm Recommended)

PRODUCT CODES:

HSYPSFRD=Yarra PRO SWiTCH Fire Rated Downlight

Fixed Bezels	Description	Tilt Bezels	Description
HSYPSWBF	White Fixed Bezel	HSYPSWBT	White Tilt Bezel
HSYSPCF	Polished Chrome Fixed Bezel	HSYSPCT	Polished Chrome Tilt Bezel
HSYPSBCF	Brushed Chrome Fixed Bezel	HSYPSBCT	Brushed Chrome Tilt Bezel
HSYPSBRF	Brass Fixed Bezel	HSYPSBRT	Brass Tilt Bezel
HSYPSBBBF	Brushed Brass Fixed Bezel	HSYPSBBBT	Brushed Brass Tilt Bezel
HSYPSBLF	Black Fixed Bezel	HSYPSBLT	Black Tilt Bezel

YARRA PRO SWITCH FIRE RATED DOWNLIGHT

PRODUCT CONSTRUCTION

Housing:

Steel/PC

Diffuser:

PC


Colour:

Black + Bezel Option

Weight:

0.37kg (Inc Bezel)

LINE DRAWING

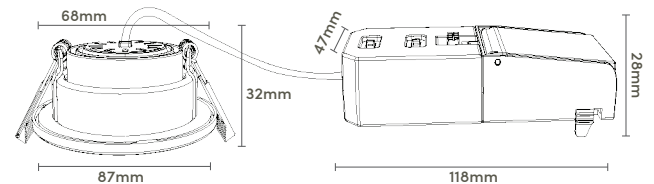

UK
CA

CE



IP65

IK08
RATED

CLASS I

5
YR
GUARANTEE

ACCESSORIES:

HSYPSCPW = Converter Plate for 90mm-100mm Diameter Holes



*All information is subject to change and should be verified before any critical action.



01257 262 197 customerservices@hispec.co.uk hispec.co.uk

Hispec Electrical Products Ltd, Unit 21 Drumhead Road, Chorley North Business Park, Chorley, PR6 7BX