HSA/PH/RF10-PRO

MULTI-SENSOR SMOKE ALARM

10YR BATTERY POWERED AND WIRELESS INTERLINK

HiSPEC
LIFE SAFETY & HOUSING SOLUTIONS

PRODUCT FEATURES:

- 10-Year sealed lithium battery
- Advanced long life
- Hush feature
- Loud 85dB alarm
- Low battery signal
- Test button
- Easy to install
- 5 year guarantee



DESCRIPTION:

The Hispec Advanced Multi Sensor Smoke Alarm and Wireless Interlink is interconnectable with up to 20 units. The Alarm is the perfect solution for detecting fast-flaming and slow smouldering fires. Powered by a sealed 10 year lithium battery, this alarm also features a test button, loud 85dB alarm and low battery warning indicator.

TECHNICAL SPECIFICATION:

Ambient Operating Temperature:	0°C ~ 40°C
Ambient Operating Humidity:	0 to 90%
Power Source:	10-Year Lithium Battery
Housing Material:	Fire Retardant ABS
Guarantee:	5 Years
Weight:	130g
Grade of Alarm:	F1
Ambient Operating Temp:	85dB at 3 metres
Max RF Distance:	Open Area 80m, Enclosed Area 30m
Transmit & Recieve Frequency:	868MHz
Detection Type:	Optical Smoke and Fixed Heat (60°C)
Approved to:	BS EN 14604:2005, BS 5446-2:2003
Designed for installation to:	BS 5839-6:2019.
LED Indicator Function:	Green = Power On, Red = Battery/Alarm Status
Max Interconnected Units:	20
Max RF Connected Units:	20
Storage Temperature:	-10 to 50°C
Storage Humidity:	0 ~ 90%RH(non-condensing)


**All information is subject to change and should be verified before any critical action.*


MULTI-SENSOR SMOKE ALARM

10YR BATTERY POWERED AND WIRELESS INTERLINK

HiSPEC
LIFE SAFETY & HOUSING SOLUTIONS

LINE DRAWINGS:

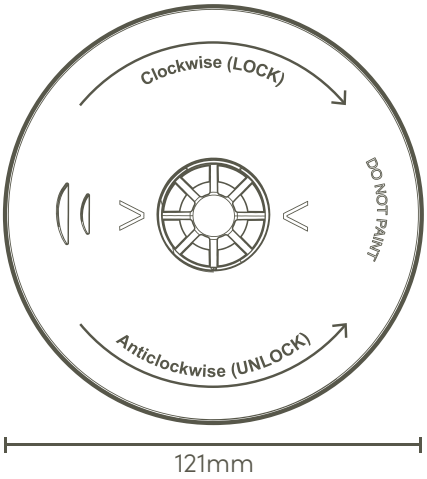

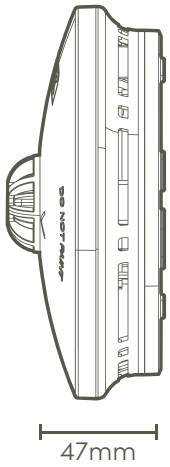

INSTALLATION LOCATIONS:



**All information is subject to change and should be verified before any critical action.*