

PRODUCT FEATURES:

- CCTK SWITCH
- Pre-wired
- Fast Fix
- Plug in sensor
- Adjustable bracket
- 90Lm/W

**DESCRIPTION:**

The Foss SWITCH Floodlight pairs energy efficiency with a sleek, compact design to provide top-notch lighting. Perfect for a variety of outdoor applications, it delivers strong performance while boosting security and visibility with its contemporary look.

TECHNICAL SPECIFICATION:

Product Code:	HSSLF010	HSSLF020	HSSLF030
Watts:	10W	20W	30W
Lumens Output:	900Lm	1800Lm	2700Lm
Lumens per Watt:	90Lm/W		
3 CCT:	3000k, 4000k or 6000k		
Voltage:	220-240v		
Cable Length:	1M		

PRODUCT CODES:

HSSLF010 =	10W LED Floodlight
HSSLF020 =	20W LED Floodlight
HSSLF030 =	30W LED Floodlight
HSSLF-SENSOR =	PIR Sensor (IP44)

PRODUCT CONSTRUCTION:

Housing Material:	Diecast aluminium
Weight (Unboxed):	0.34kg (10W) 0.42kg (20W & 30W)
Cable Entry:	1M Rubber Cable


*All information is subject to change and should be verified before any critical action.



LED FOSS SWITCH FLOODLIGHT

WITH OPTIONAL PLUG IN PIR

LINE DRAWINGS:

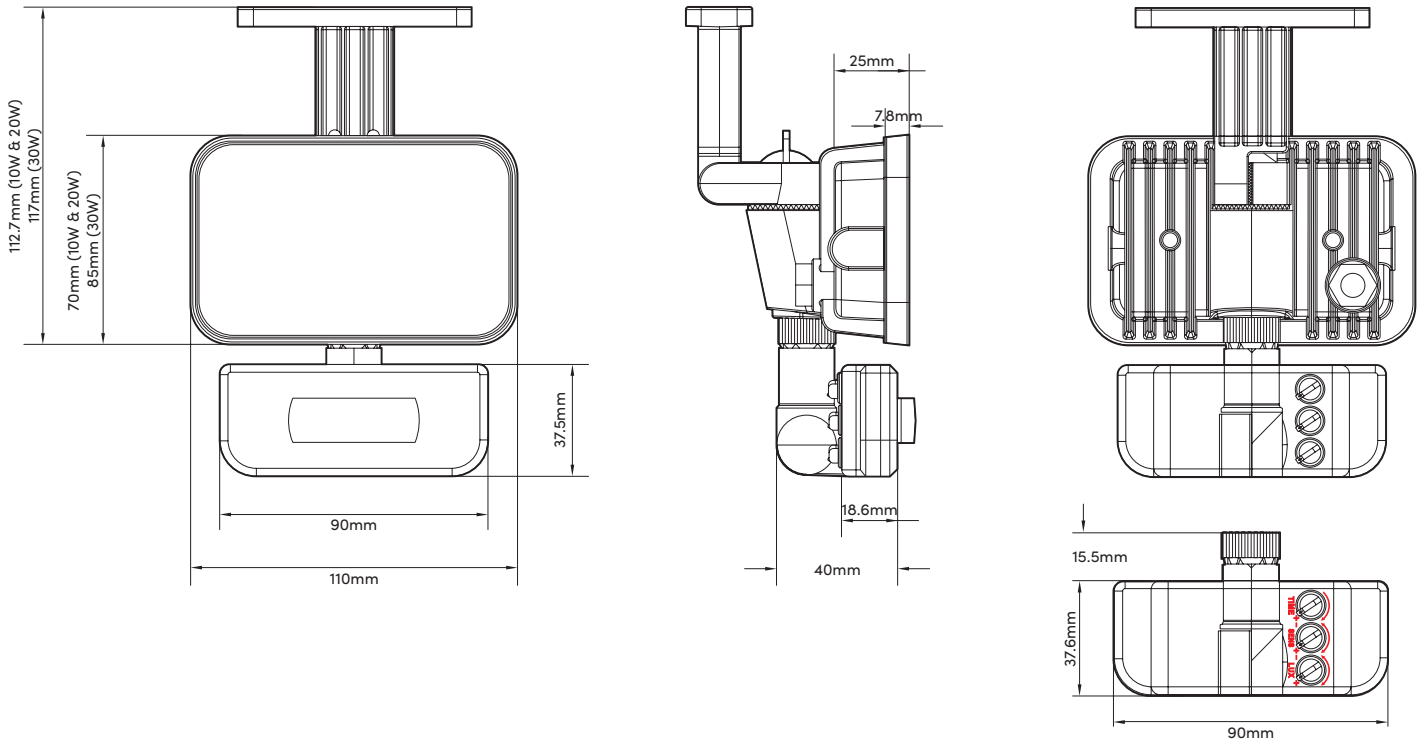

PIR SENSOR SETTINGS:

TIME:	10Sec +/- 3sec (Min) - 7Mins +/- 2Mins (Max)
SENS:	2Metres (Min) - 12Metres (Max)
LUX:	10Lux (Min) - 2000Lux (Max)
Detection Angle:	160°



*All information is subject to change and should be verified before any critical action.

